


PTZ-3601-IZ**6MP 3X Human & Vehicle Detection POE PTZ Dome****Features:**

- ❖ 1/2.8" Sony low-light CMOS sensor
- ❖ 6MP 25fps resolution 3072x2048
- ❖ low illumination 0.01Lux
- ❖ Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- ❖ D-WDR, Mirror, flip, Defogging
- ❖ Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- ❖ RTSP and Onvif 17.06 compatible with many third-party NVR
- ❖ H.264/H.265 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Support user authentication, video data encryption
- ❖ Support Alarm Snapshot to Email and FTP
- ❖ Multiply WEB browser IE,Firefox 32bit ESR, PC Client, Mobile APP remote access
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing IP66
- ❖ 3 pcs Array IR Leds, IR distance 20-30 meters
- ❖ Network PTZ control , 3X optical zoom
- ❖ HD 2.8-8mm motorized AF lens
- ❖ Built-in Mic, reset button
- ❖ Support Human body detection, Vehicle detection

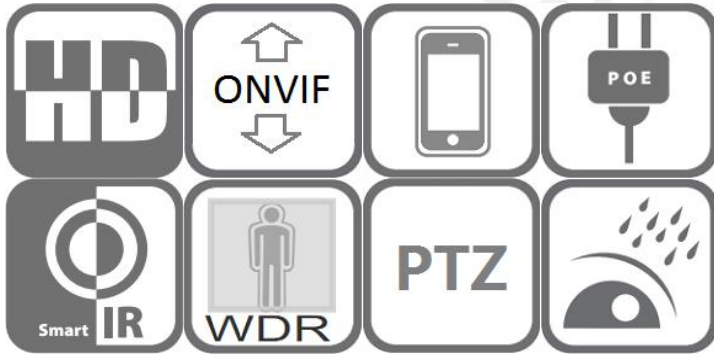

Technical Specifications:

Model	PTZ-3601-IZ M716IR-3X-V3
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	6 megapixels
Electronic Shutter	AUTO, 10-10000/min
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	AGC,Motion Detection,Privacy Mask,Flip,OSD overlay
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@6MP(3072x2048)/25fps@5MP(2592x1944)/4MP(2592x1520)/3MP, 30fps@1080P/720P Sub stream: 25fps@D1/VGA/360P/CIF, etc.
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
Built-in Mic	Yes
IR Led	
IR Led	3 pcs Array IR Led
IR Distance	20-30 Meters
Lens	
Focal length	2.8-8mm motorized AF lens
Zoom	3x optical zoom
Function	
PoE, Mic, Human body detection, Vehicle detection, reset button	
PTZ	
Pan/Tilt Range	Pan: 0° ~ 350°; Tilt: 0° ~ 90°
Preset Point	255
Manual Control Speed	Pan: 0.5° ~80° /s; Tilt: 0.5° ~60° /s
Power-off Recovery	Support
Network Services	
Protocol	HTTP/RTSP/FTP/DST/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox (32bit esr), etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	Default: PoE (12V DC ± 10% optional)
Power Consumption	< 10 W

Operating Temp.	-30°C-(+60)°C, 10%-90%RH
-----------------	--------------------------

