PG camera wide dynamic settings

1. First connect the camera to the switch (or router) with a network cable, connect the computer network cable to the same switch (or router), download the search software AjDevTools from the computer, search, select the camera and modify the IP address on the same network segment as the computer .

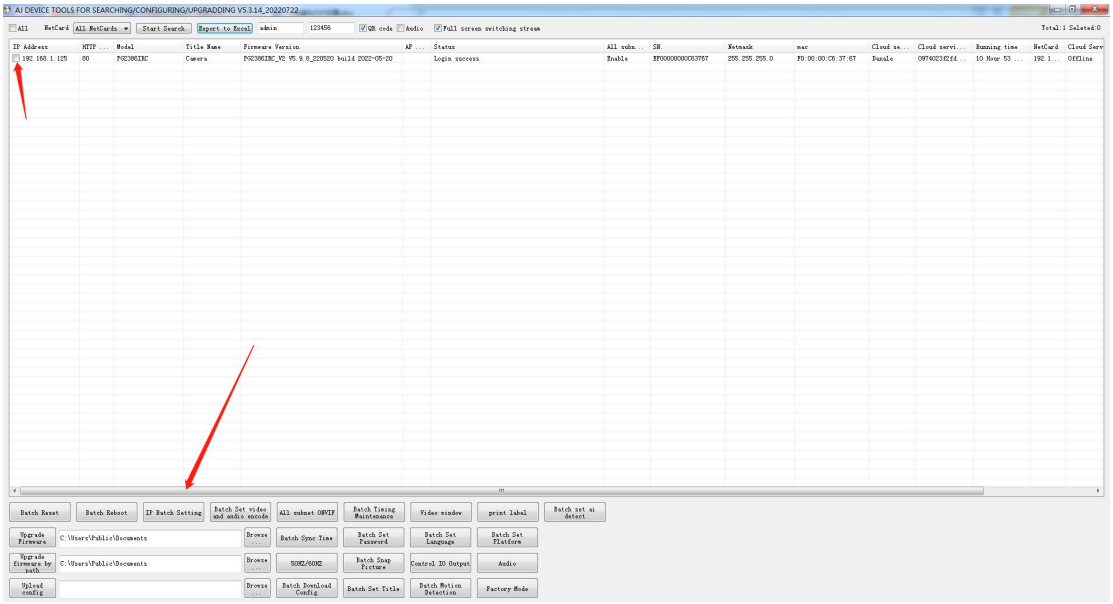

2. Open the browser and enter the IP address of the camera, enter the web login interface, the default user name is admin, and the default password is 123456

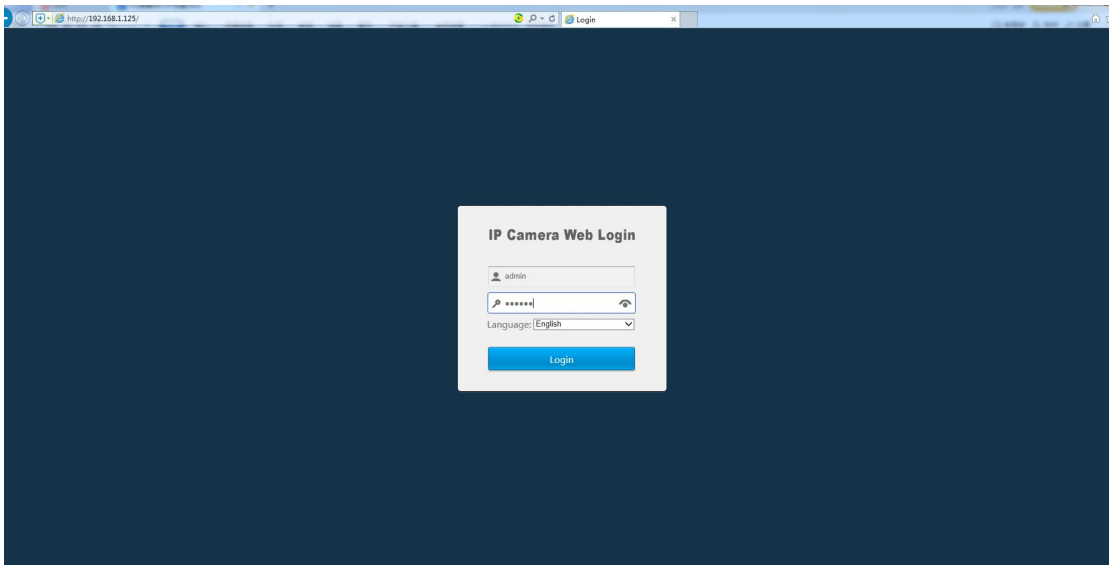

3.After logging in, click Settings - Camera - Graphics - WDR - Enable.

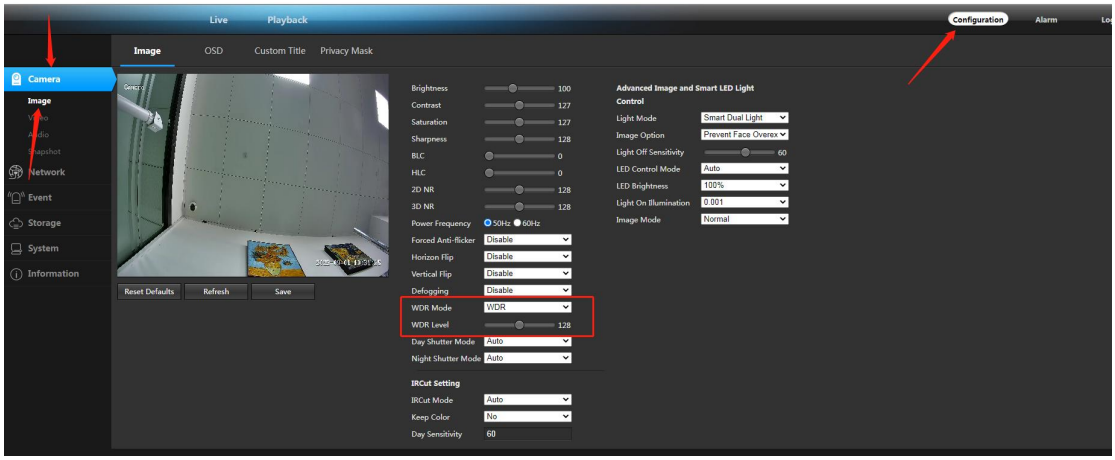
Live
Playback
Configuration
Alarm
Image
OSD
Custom Title
Privacy Mask
Camera
Image
Network
Event
Storage
System
Information
Reset Defaults
Refresh
Save
Brightness 100
Contrast 127
Saturation 127
Sharpness 128
BLC 0
HLC 0
2D NR 128
3D NR 128
Power Frequency 50Hz 60Hz
Forced Anti-flicker Disable
Horizon Flip Disable
Vertical Flip Disable
Defogging Disable
WDR Mode WDR
WDR Level 128
Day Shutter Mode Auto
Night Shutter Mode Auto
IRCut Setting
IRCut Mode Auto
Keep Color No
Day Sensitivity 60
Advanced Image and Smart LED Light Control
Light Mode Smart Dual Light
Image Option Prevent Face Overex
Light Off Sensitivity 60
LED Control Mode Auto
LED Brightness 100%
Light On Illumination 0.001
Image Mode Normal